



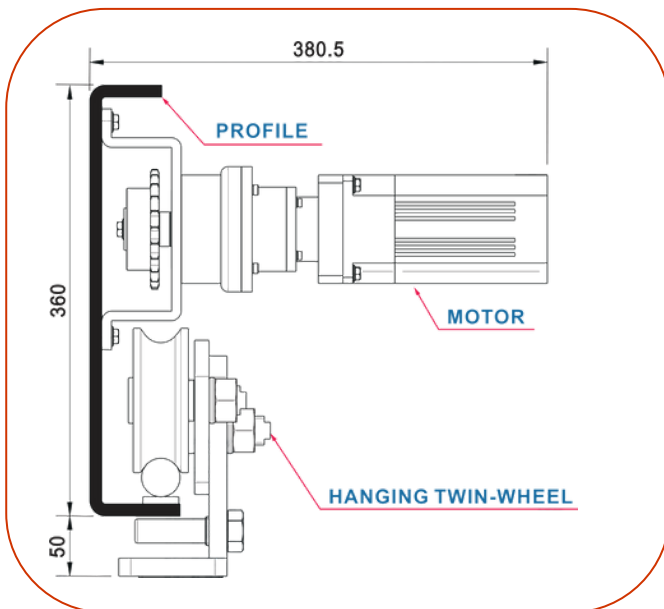

Technical Datasheet GSH2000

Positions of all components in the guide rail

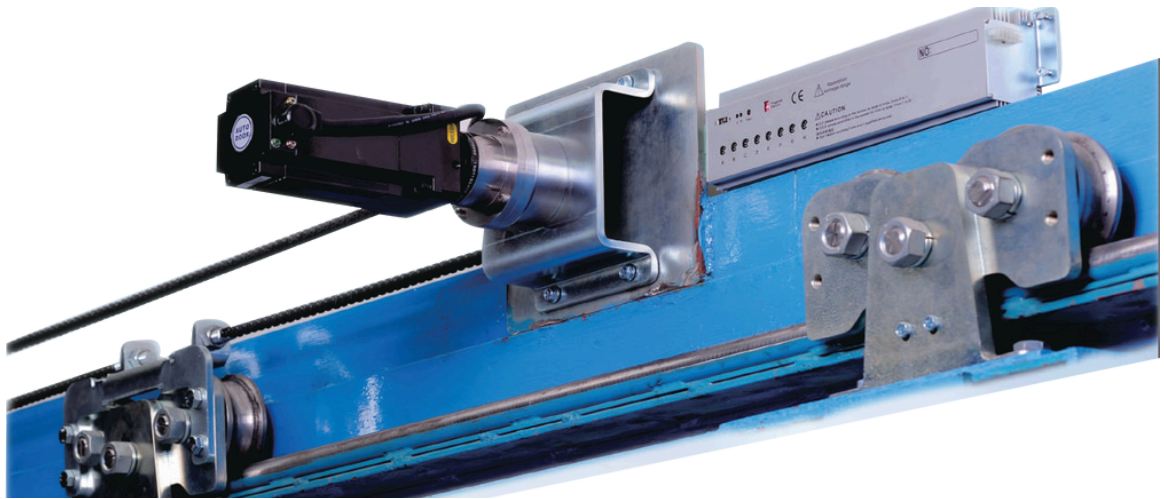

Technical Details

Door Weight : 2000 kg X 1 (Door) / 1500KG X 2

Door Width : 1M-6M

Install Way : Surface Install

Motor : DC24V 180 W BRUSHLESS DC MOTOR
(Planetary Gear)

Control : Standard Micro-Control

Power Consumption : 250 W

Voltage : AC100V-240V

Environmental Temperature : -20°C-50°C

Volume : 65 Decibel (Max)

Starting Speed : 150mm/Sec. / 120mm/Sec.

Starting Time : 0~20 Sec. (Regulable)

Transmission Important Condition : Roller Chain 40-1R

Opening Door Range : FULL/Half-Open (Regulable)

PFC Power Efficiency : 0.95 (In AC100V Full Load)

Traction Force : When power off the door can be
open-ended by manual

COMPONENT LIST

