



Technical Datasheet GSD120



Positions of all components in the guide rail

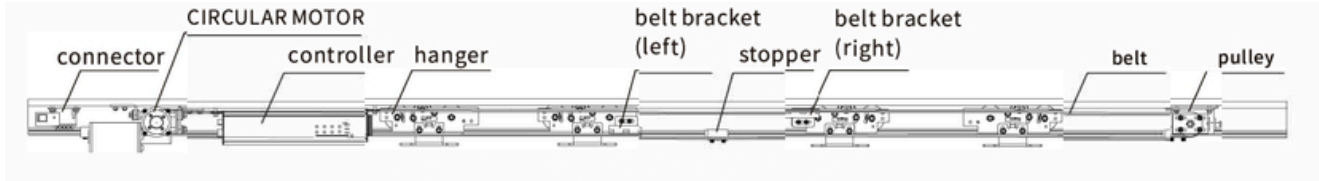

Side view of guide rail and hanger

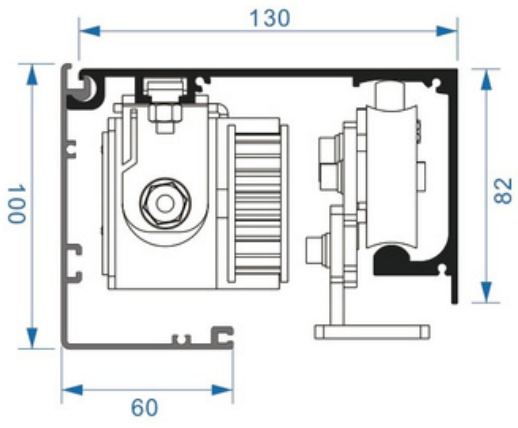

COMPONENT LIST

		
Cover plate	Track	Hanger
		
Motor	Controller	Sensor
		
Belt	Pulley	Glass clamp & Floor guides

Technical Details

Model	GSD120
Single leaf <ul style="list-style-type: none"> • Door Leaf Weight • Door leaf width • Width of door opening • Manual thrust 	Max.120kg DW=400-3000mm W=400-3000mm <40N
Double leaf <ul style="list-style-type: none"> • Door Leaf Weight • Door leaf width • Width of door opening • Manual thrust 	Max.100kg DW=400-3000mm W=400-3000mm <50N
Installation Method	Surface installation
Power voltage	AC 110-250V ,50Hz
Power consumption	60W
Opening speed	15-50cm/s (adjustable)
Closing speed	13-50cm/s (adjustable)
Door-hold open time	0-20s (adjustable)
Class of protection (IP Rating)	IP44
Working environment temperature	-20 °C- + 50 °C